

Vertical installations of ceramic tile or stone require expertise, high performance products and a proven track record of success.



Our Exterior Façade System is the benchmark of the industry. For those interior or exterior applications requiring maximum installation speed and strength, LATAPOXY® 310 Stone Adhesive is a high strength epoxy adhesive that is extremely productive and fast to install and is building code approved with extensive global installations. 4237 Latex Additive / 211 Crete Filler Powder, 335 Premium Flexible Adhesive and our non-sag 4-XLT Thin and Medium Bed Adhesive are ideal for exterior façades of tile and stone ranging from mosaics to large thin ceramic panels. From granite to marble to sandstone.



SYSTEM COMPONENTS:

HYDRO BAN®

- Bonds directly to metal and a variety of plastic plumbing fixtures
- Anti-fracture protection of up to 3 mm over shrinkage and other non-structural cracks
- Extra Heavy Service rating per ASTM C627 performance levels
- Meets Australian Standards, ANSI A118.10 and ANSI A118.12 standards
- Class 3 Membrane as per AS4858, IAPMO and ICE approved

335 Premium Flexible Adhesive

- Suitable for interior and exterior applications
- Exceptional bond strength and easy workability
- Extended open time
- Suitable for submerged installations
- Exceeds the requirements of AS ISO 13007.1 as a C2TES1 adhesive

4-XLT

- Thin and medium bed applications
- Locks in dust during mixing for less mess
- Incredible non-sag performance, up to 19 mm thick beds
- Utilises Water Dispersion Technology allowing for different adhesive consistencies
- Meets and exceeds AS4992.1 as a C1TS1 Adhesive

LATAPOXY® 310 Stone Adhesive

- Fast permanent bond
- Withstands shock and vibration
- Approved for exterior installations by building codes: ICC, IBC
- Meets ANSI A118.3, meets EN 12004/R2T and meets ISO 13007-1/R2T

PERMACOLOR® Grout†


- High Performance cement based grout
- Inhibits the growth of stain-causing mould and mildew with antimicrobial protection
- Meets and exceeds the requirements of AS4992.3 as a CG2FAW

LATASIL™


- 100% silicone sealant
- Available in 10 colours and clear
- Use in fully submerged or wet areas when used with LATASIL™ 9118 Primer
- Meets ASTM C794 and C920

4237 Latex Additive / 211 Crete Filler Powder

- High strength latex / PC thin and medium bed adhesive
- Flexible and shock resistant; rated for extra heavy traffic conditions
- Weather and frost resistant for interior and exterior use in all types of climates
- Superior bond strength – 250% greater than ANSI A118.4
- Meets and exceeds AS4992.1 as a C2S1

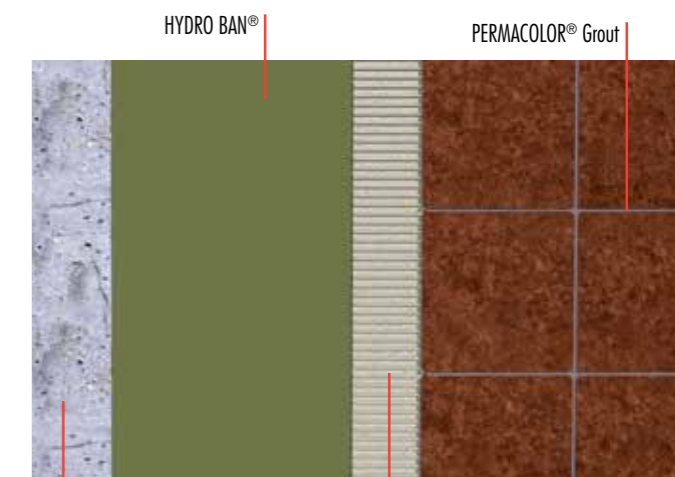

Properly Prepared Concrete, Backer Board or Masonry Substrates (if substrate requires leveling, use 3701 Fortified Mortar Bed)

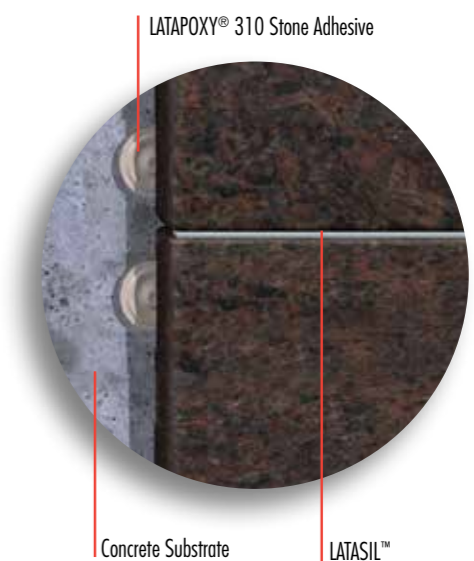

Concrete Substrate LATASIL™

